





## 2.4 GPM VISCOMAT GEAR OIL TRANSFER PUMP




SKU: F00304210



Price: ~~\$975.00~~ \$926.25

Add to Cart

Categories: [Heavy Oil Pumps](#), [Light Oil Pumps](#), [Oil Transfer Pumps](#) |

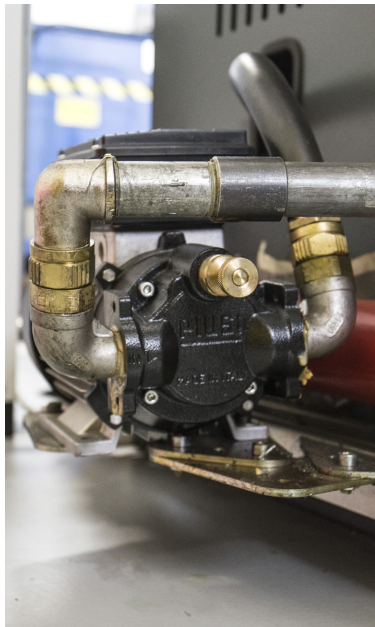

### SPECIFICATIONS

<b>Weight</b>	31 lbs
<b>Dimensions</b>	13 x 4.4 x 8 in
<b>Fluid</b>	Heavy Oils like Gear Oil, Motor Oil



<b>Voltage</b>	120V, 230V
<b>Speed</b>	3GPM

## **PRODUCT DESCRIPTION**

The 200/2 Viscomat Gear is a high-performance oil transfer pump that is distinguished by its self-priming gear pump, which has the capability to provide consistent and steady flow rates while dispensing fluids with high viscosity of up to 2000 cSt. It can achieve a flow rate of up to 2.4 GPM, ensuring reliable and efficient performance.

### **Gear-type oil pumps**

VISCOMAT 200/2 gear pumps have been designed as modern, effective solutions for the various requirements of pumping oils and lubricants. Thanks to the several available models VISCOMAT satisfies the need to:

- Transfer quantities of product at medium pressure between tanks
- Guarantee good flow rates at high pressure in applications in which the pump must supply the reeling drums of fixed, "in-line" oil distribution systems on fixed pumping systems

### **Common features of all models are:**

- Quiet operation
- Regularity of flow characterized by the absence of pulsations
- Closed-delivery operation option thanks to the incorporated adjustable BYPASS
- High suction capacity
- Compact design

### **Construction characteristics**

- Asynchronous, closed, self-ventilating
- AC motor (protection grade IP 55) available in various voltages and frequencies
- Die-cast aluminum pump body
- By-pass integrated into the pump body
- Sintered steel gears, with a specially designed internal profile
- Mechanical seal on the motor shaft, accessible from the pump side
- Incorporated self-priming device


### **Performance Characteristics**

- Flow rate 2.4 GPM
- Pressures from 12 bar (170 psi)
- Continuous operation
- Noise less than 70 dB
- Suitable for Biodiesel
- 3/4" Threaded Inlet and Outlet Connections

## **RELATED PRODUCTS**



**Industrial Oil  
Transfer Pump -  
25GPM - Single Phase**



**Industrial Oil  
Transfer Pump -  
60GPM**



**Stainless Food Grade  
Pump 5GPM**



**Gear Oil Pump -  
Pumphead Only**

Since 2009, we have been supplying portable and stationary pumps for moving all types of oil. Oil cleaning centrifuges are also important tools to re-use oil as fuel or lubricant.

**Contact Us:**

2121 Natomas Crossing STE 200-218  
Sacramento, CA 95835  
1-888-959-9311  
[info@alternativefuelmecca.com](mailto:info@alternativefuelmecca.com)

