Alternative Fuel Mecca

2121 Natomas Crossing STE 200-218
Sacramento, CA 95835
1-888-959-9311
info@alternativefuelmecca.com

# 2.4 GPM VISCOMAT GEAR OIL TRANSFER PUMP


**SKU:** F00304210



**Price:** ~~$975.00~~ $926.25


Add to Cart

**Categories:** Heavy Oil Pumps, Light Oil Pumps, Oil Transfer Pumps |

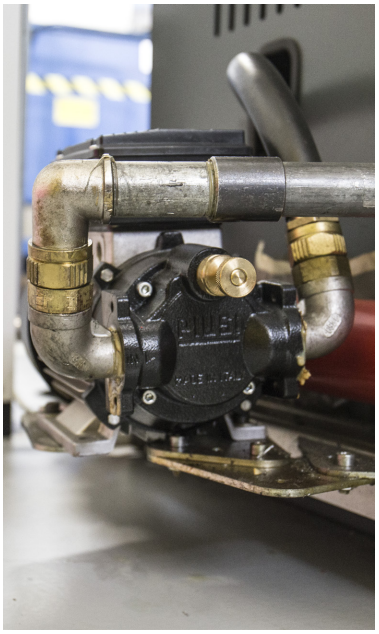







## SPECIFICATIONS

| | |
|---|---|
| **Weight** | 31 lbs |
| **Dimensions** | 13 × 4.4 × 8 in |
| **Fluid** | Heavy Oils like Gear Oil, Motor Oil |

2121 Natomas Crossing STE 200-218
Sacramento, CA 95835
1-888-959-9311
info@alternativefuelmecca.com

| | |
|---|---|
| **Voltage** | 120V, 230V |
| **Speed** | 3GPM |

## PRODUCT DESCRIPTION

The 200/2 Viscomat Gear is a high-performance oil transfer pump that is distinguished by its self-priming gear pump, which has the capability to provide consistent and steady flow rates while dispensing fluids with high viscosity of up to 2000 cSt. It can achieve a flow rate of up to 2.4 GPM, ensuring reliable and efficient performance.

**Gear-type oil pumps**

VISCOMAT 200/2 gear pumps have been designed as modern, effective solutions for the various requirements of pumping oils and lubricants. Thanks to the several available models VISCOMAT satisfies the need to:

- Transfer quantities of product at medium pressure between tanks
- Guarantee good flow rates at high pressure in applications in which the pump must supply the reeling drums of fixed, “in-line” oil distribution systems on fixed pumping systems

**Common features of all models are:**

- Quiet operation
- Regularity of flow characterized by the absence of pulsations
- Closed-delivery operation option thanks to the incorporated adjustable BYPASS
- High suction capacity
- Compact design

**Construction characteristics**

- Asynchronous, closed, self-ventilating
- AC motor (protection grade IP 55) available in various voltages and frequencies
- Die-cast aluminum pump body
- By-pass integrated into the pump body
- Sintered steel gears, with a specially designed internal profile
- Mechanical seal on the motor shaft, accessible from the pump side
- Incorporated self-priming device

**Performance Characteristics**

- Flow rate 2.4 GPM
- Pressures from 12 bar (170 psi)
- Continuous operation
- Noise less than 70 dB
- Suitable for Biodiesel
- 3/4” Threaded Inlet and Outlet Connections

## RELATED PRODUCTS


2121 Natomas Crossing STE 200-218
Sacramento, CA 95835
1-888-959-9311
info@alternativefuelmecca.com




**25GPM Portable Oil Transfer Pump - Massive Gears**



**Food Grade Stainless Oil Circulating Pump 2GPM**



**Industrial Oil Transfer Pump - 25GPM -3 Phase**



**Industrial Oil Transfer Pump - 25GPM - Single Phase**

Since 2009, we have been supplying portable and stationary pumps for moving all types of oil. Oil cleaning centrifuges are also important tools to re-use oil as fuel or lubricant.

**Contact Us:**
2121 Natomas Crossing STE 200-218
Sacramento, CA 95835
1-888-959-9311
info@alternativefuelmecca.com