Alternative Fuel Mecca

2121 Natomas Crossing STE 200-218
Sacramento, CA 95835
1-888-959-9311
info@alternativefuelmecca.com

2.4 GPM VISCOMAT GEAR OIL TRANSFER PUMP


SKU: F00304210



Price: ~~$975.00~~ $926.25


Add to Cart

Categories: Heavy Oil Pumps, Light Oil Pumps, Oil Transfer Pumps |

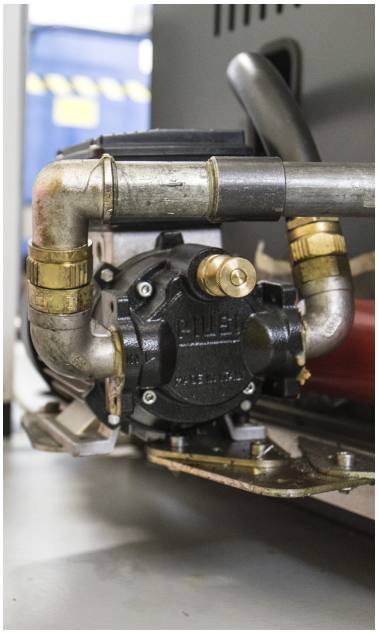







SPECIFICATIONS

Weight	31 lbs
Dimensions	13 × 4.4 × 8 in
Fluid	Heavy Oils like Gear Oil, Motor Oil

2121 Natomas Crossing STE 200-218
Sacramento, CA 95835
1-888-959-9311
info@alternativefuelmecca.com

Voltage	120V, 230V
Speed	3GPM

PRODUCT DESCRIPTION

The 200/2 Viscomat Gear is a high-performance oil transfer pump that is distinguished by its self-priming gear pump, which has the capability to provide consistent and steady flow rates while dispensing fluids with high viscosity of up to 2000 cSt. It can achieve a flow rate of up to 2.4 GPM, ensuring reliable and efficient performance.

Gear-type oil pumps

VISCOMAT 200/2 gear pumps have been designed as modern, effective solutions for the various requirements of pumping oils and lubricants. Thanks to the several available models VISCOMAT satisfies the need to:

- Transfer quantities of product at medium pressure between tanks
- Guarantee good flow rates at high pressure in applications in which the pump must supply the reeling drums of fixed, “in-line” oil distribution systems on fixed pumping systems

Common features of all models are:

- Quiet operation
- Regularity of flow characterized by the absence of pulsations
- Closed-delivery operation option thanks to the incorporated adjustable BYPASS
- High suction capacity
- Compact design

Construction characteristics

- Asynchronous, closed, self-ventilating
- AC motor (protection grade IP 55) available in various voltages and frequencies
- Die-cast aluminum pump body
- By-pass integrated into the pump body
- Sintered steel gears, with a specially designed internal profile
- Mechanical seal on the motor shaft, accessible from the pump side
- Incorporated self-priming device

Performance Characteristics

- Flow rate 2.4 GPM
- Pressures from 12 bar (170 psi)
- Continuous operation
- Noise less than 70 dB
- Suitable for Biodiesel
- 3/4” Threaded Inlet and Outlet Connections

RELATED PRODUCTS

2121 Natomas Crossing STE 200-218
Sacramento, CA 95835
1-888-959-9311
info@alternativefuelmecca.com



Food Grade Stainless Oil Circulating Pump 2GPM



480V Oil Pump at 12GPM



Portable Oil Transfer Pump Reversible Switch



Portable Pumphead Replacement Gasket

Since 2009, we have been supplying portable and stationary pumps for moving all types of oil. Oil cleaning centrifuges are also important tools to re-use oil as fuel or lubricant.

Contact Us:
2121 Natomas Crossing STE 200-218
Sacramento, CA 95835
1-888-959-9311
info@alternativefuelmecca.com