



## FRYER OIL CIRCULATION PUMP

SKU: fopi34



**Price:** \$595.00

4 Gallons/Minute(15l)

3/4HP Motor


2.5m Head pressure

1/2" Ports

29lbs

15"x10"x10.5

**Categories:** [Oil Transfer Pumps](#) |

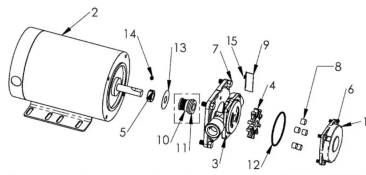

## SPECIFICATIONS

|                   |                      |
|-------------------|----------------------|
| <b>Weight</b>     | 25 lbs               |
| <b>Dimensions</b> | 20 x 18 x 18 in      |
| <b>Fluid</b>      | Diesel or Light Oils |



|                |            |
|----------------|------------|
| <b>Speed</b>   | 4-7GPM     |
| <b>Voltage</b> | 120V, 230V |



## PRODUCT DESCRIPTION

Introducing the AFM Frying Oil Pump – the epitome of innovation for the service industry. Crafted with precision and efficiency in mind, this self-priming, positive displacement pump boasts a robust construction of cast-iron, ensuring durability even in high-temperature environments.

Designed specifically for hot oil or frying oil filtration with a capability of handling temperatures up to 375°F, our pump proudly meets NSF-listing requirements. It's the ideal companion for a diverse range of commercial fat fryer applications, offering impeccable performance in hot oil cooking, filtering, and waste oil rendering.

### Key Features:

- **NSF-Listed Excellence:** Our pumps adhere to NSF-listed standards, including NSF-accepted paint tailored for hot oil cooking applications, ensuring compliance with industry regulations. CE motor

- **Versatile Operation:** Experience the flexibility of bi-directional operation, allowing seamless integration into various processes.

- **Powerful Performance:** With the ability to handle pressures up to 40 PSI (configurable motors) and flow rates reaching 8.2 gallons per minute, this pump delivers unparalleled performance.

- **High-Temperature Resilience:** Operating temperatures up to 375°F make this pump a reliable choice for demanding environments.

- **Efficient Design:** The non-clogging Teflon roller design ensures smooth and hassle-free operation, while suction lift capabilities reach up to 7.5 feet of head.

- **Application Versatility:** While perfect for NSF hot oil applications, this pump is also suitable for non-NSF hot oil scenarios involving non-particulate and non-abrasive fluids compatible with its construction materials.

- **Safety Assured:** AC ODP single-phase motors come equipped with thermal overload protection, providing an added layer of safety.

- **Flexible Installation:** Ports can be conveniently rotated either vertically or horizontally to suit your specific setup.

Please note that the AFM Frying Oil Pump is not intended for use with water-based fluids. Elevate your restaurants with a pump designed for reliability, efficiency, and compliance.

## RELATED PRODUCTS



[230V Oil Pump 25GPM - 2HP](#)



[Oil Pump Hose Kit - 1.25 Inch](#)



[HD Portable Oil Transfer Pump - Massive Gears](#)



[Stainless Steel 25GPM Oil Transfer Pump](#)

Since 2009, we have been supplying portable and stationary pumps for moving all types of oil. Oil cleaning centrifuges are also important tools to re-use oil as fuel or lubricant.



**Contact Us:**

2121 Natomas Crossing STE 200-218  
Sacramento, CA 95835  
1-888-959-9311  
[info@alternativefuelmecca.com](mailto:info@alternativefuelmecca.com)

