





## **HIGH FLOW DEF PUMP - HIGH PRESSURE**

**SKU:** CRN 5-12 A-FGJ-A-V-HQQV



**Price:** ~~\$4,750.00~~ \$4,512.50


Add to Cart

Vertical, multistage centrifugal pump with suction and discharge ports on the same level. Pump materials in contact with the liquid are in high-grade stainless steel.

35 Gallons/minute

120PSI of Head

**Categories:** [DEF Transfer](#) |

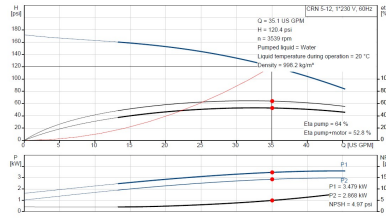

## SPECIFICATIONS

### PRODUCT DESCRIPTION

Vertical, multistage centrifugal pump with inlet and outlet ports on same the level (inline). Pump materials in contact with the liquid are in high-grade stainless steel. A cartridge shaft seal ensures high reliability, safe handling, and easy access and service. Power transmission is via a rigid split coupling. Pipe connection is via combined DIN-ANSI-JIS flanges.

Flow: 35.1 US GPM

Head: 120.4 psi

Efficiency: 52.8 %

Liquid: Water

Temperature: 20 °C

NPSH required: 4.97 psi

Specific Gravity: 1.000

Max pressure at stated temp: 25 bar / 90 °C

Liquid temperature range: -20 .. 90 °C

Maximum ambient temperature: 40 °C

Shaft seal: HQV



Product number: 99917034  
Rated power - P2: 3.7 kW  
Rated voltage: 208-230 V  
Mains frequency: 60 Hz  
Enclosure class: TEFC  
IP55  
Insulation class: F  
Motor protection: PTO  
Motor type: WEG or WWE  
Eta 1/1: 84.0 %

## RELATED PRODUCTS



### DEF Transfer 12GPM

Since 2009, we have been supplying portable and stationary pumps for moving all types of oil. Oil cleaning centrifuges are also important tools to re-use oil as fuel or lubricant.

#### Contact Us:

2121 Natomas Crossing STE 200-218

Sacramento, CA 95835

1-888-959-9311

[info@alternativefuelmecca.com](mailto:info@alternativefuelmecca.com)

