



HIGH FLOW DEF PUMP - HIGH PRESSURE

SKU: CRN 5-12 A-FGJ-A-V-HQQV



Price: ~~\$4,750.00~~ \$4,512.50


Add to Cart

Vertical, multistage centrifugal pump with suction and discharge ports on the same level. Pump materials in contact with the liquid are in high-grade stainless steel.

35 Gallons/minute

120PSI of Head

Categories: [DEF Transfer](#) |

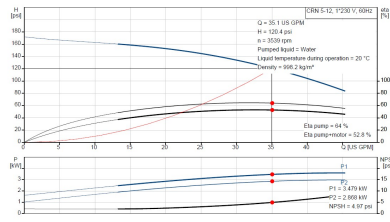

SPECIFICATIONS

PRODUCT DESCRIPTION

Vertical, multistage centrifugal pump with inlet and outlet ports on same the level (inline). Pump materials in contact with the liquid are in high-grade stainless steel. A cartridge shaft seal ensures high reliability, safe handling, and easy access and service. Power transmission is via a rigid split coupling. Pipe connection is via combined DIN-ANSI-JIS flanges.

Flow: 35.1 US GPM

Head: 120.4 psi

Efficiency: 52.8 %

Liquid: Water

Temperature: 20 °C

NPSH required: 4.97 psi

Specific Gravity: 1.000

Max pressure at stated temp: 25 bar / 90 °C

Liquid temperature range: -20 .. 90 °C

Maximum ambient temperature: 40 °C

Shaft seal: HQQV



Product number: 99917034

Rated power - P2: 3.7 kW

Rated voltage: 208-230 V

Mains frequency: 60 Hz

Enclosure class: TEFC

IP55

Insulation class: F

Motor protection: PTO

Motor type: WEG or WWE

Eta 1/1: 84.0 %

RELATED PRODUCTS



DEF Transfer 12GPM

Since 2009, we have been supplying portable and stationary pumps for moving all types of oil. Oil cleaning centrifuges are also important tools to re-use oil as fuel or lubricant.

Contact Us:

2121 Natomas Crossing STE 200-218

Sacramento, CA 95835

1-888-959-9311

info@alternativefuelmecca.com

