



LOW VIBRATION SANITARY PUMP 100GPH

SKU: SP215-22-180



Price: \$9,505.00

Add to Cart


Self Priming

For Sanitary Applications

316 stainless contact parts

Custom Electric motors - 120V/230V/480V/Explosion Proof/Washdown

Categories: [Stainless Pumps](#) |

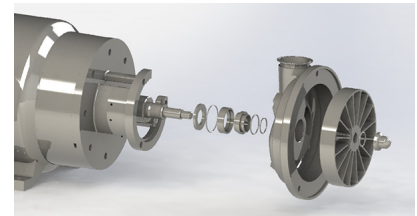

SPECIFICATIONS

Weight	50 lbs
Dimensions	20 x 14 x 16 in
Fluid	Sanitary or Caustic Fluids
Voltage	120V, 230V, 460V, 12V, 24V, 3 Phase
Speed	60GPM



PRODUCT DESCRIPTION


The self-priming capability of Ampco's SP liquid ring pumps make them ideally suited for CIP return applications and for handling products with entrained air.

- The ability to handle products with entrained air makes SP pumps extremely efficient for emptying tanks and drums.
- Tight manufacturing tolerances and the unique vane-shaped impeller enables SP pumps to handle shear sensitive products efficiently.
- SP pumps are available with either single or double external mechanical seals. • Standard adapters are made of 304 SS to resist corrosion.

*Pumps are in conformance with 3A sanitary standards for centrifugal and positive rotary pumps for milk and milk products, Number 02-10.

SP-Series pumps have a standard 32RA (150 grit) finish, on all product contact surfaces.

RELATED PRODUCTS

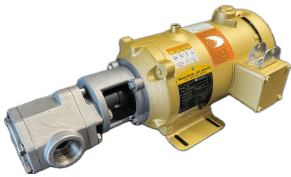

**Stainless Steel
25GPM Oil Transfer
Pump**



**HD Oil Transfer Pump
with Bypass - 8GPM**



**Sanitary Diaphragm
Pump - Stainless 316**



**Stainless Food Grade
Pump 5GPM**

Since 2009, we have been supplying portable and stationary pumps for moving all types of oil. Oil cleaning centrifuges are also important tools to re-use oil as fuel or lubricant.

Contact Us:

2121 Natomas Crossing STE 200-218

Sacramento, CA 95835

1-888-959-9311

info@alternativefuelmecca.com

